

Invacare® Storm®4 Max AA2

Please contact Invacare EU Export Customer Services on :-
Tel : +33 247 626980 ; Email : serviceclient_export@invacare.com
Or visit our website : www.invacare.eu.com



Invacare® Storm®4 Max AA2

Indoor and outdoor rear wheel drive power chair



Description:

- Wheelchair weight: from 190 kg
- Maximum user weight: 220 kg.
- 2-year warranty excluding batteries and wearing parts.


Date :

User name :

Customer Code :

Dealer stamp:

☐ Please make your selection with a cross in the box ☒ Standard configuration ☐ Free of charge

CODE		DESCRIPTION	NC : Non Compatible NC : 9999 : non compatible with the reference 9999	EUROS	
AWC0016	☐	Invacare® Storm® ⁴ Max AA2		14 192,42	
SEATING TYPE					
AWC1145	☐	MAX Seat Unit		◆	 1106
Backrest Type					
AWC1106	☐	Tension-adjustable backrest (height of 630 mm for seat		◆	
SEAT WIDTH - '+ 100 mm adjustment per armrest					
AWC0378	☐	Seat Width of Seat Frame 550 mm		◆	
AWC1459	☐	Seat Cushion MAX (550 x 635 mm)		◆	
AWC0380	☐	Seat Width of Seat Frame 610 mm	NC : 0503	○	
AWC1460	☐	Seat Cushion MAX (610 x 635 mm)		○	
SEAT DEPTH					
AWC0396	☐	560 mm	AWC0397 ☐ 595 mm	○	
AWC0399	☐	Adapter to shorten the seat depth by 130 mm		85,31	 0635
AWC0278	☐	Black bi-stretch PU upholstery of seat and back cushions		◆	
ARMREST - With reinforced, depth adjustable bracket					
AWC0635	☐	Fixed Armrest, 250 - 340 mm tool adjustable in height, removable		○	
ARMPADS					
AWC0647	☐	Standard Armpad (325 mm)		◆	
AWC0649	☐	Armpad extended 375 mm)		78,67	
HEADREST					
AWC1432	☐	Headrest, sideways adjustable		◆	 1432
AWC1427	☐	Headrest with cheek support, sideways adjustable		314,69	
SEAT HEIGHT					
Seat height (measured without seat cushion)					
AWC1025	☐	Fix Seat Height 480 mm		◆	
AWC1006	☐	Fix Seat Height 510 mm		○	
SEAT TILT					
AWC1002	☐	Manual Seat Tilt by spindle		◆	
AWC1014	☐	Electrical Tilt 0° to 15°		787,68	
BACKREST RECLINER					
AWC0947	☐	Electrical Recliner		◆	
LEGREST PAIRS					
HANGER TYPES					
AWC0564	☐	Reinforced legrest brackets adjustable in angle by screws 90°- 65°; including XL calf supports individually adjustable in angle and depth 0583 with reinforced one-piece footplate 0599 angle-adjustable and foldable backwards, not retractable (up to 220 kg)		◆	
AWC0503	☐	Standard legrest brackets adjustable 90°- 65°, retractable in/out including XL calf supports individually adjustable in angle and depth 0583, with monobloc pallet 0522 adjustable in angle and retractable, width: 335 mm (up to 200 kg)		○	

LiNX REMOTES with proportional Joystick + BRACKETS



LiNX 10-WAY SWITCH

AWC2251	☐	10-Way Switch DLX-SW10-A for direct Powered Seating Access		507,11
AWC2217	☐	Bracket RH, mounted for user	NC : 1415	○
AWC2218	☐	Bracket LH, mounted for user	NC : 1339	○
AWC2227	☐	Bracket RH, mounted for attendant	NC : 2219, 2220	○
AWC2228	☐	Bracket LH, mounted for attendant	NC : 2219, 2220	○
AWC2252	☐	Loom providing jack sockets for “Drive” and “Mode”		82,46

AWC1685	☐	Red Buddy Button		130,81
AWC1686	☐	Yellow Buddy Button		130,81
AWC1687	☐	Green Buddy Button		130,81
AWC1690	☐	Blue Buddy Button		130,81

AWC1711		Red Piko Button		130,81
AWC1712		Yellow Piko Button		130,81
AWC1713		Green Piko Button		130,81
AWC1714		Orange Piko Button		130,81
AWC1715		Blue Piko Button		130,81
AWC1716		Black Piko Button		130,81



BODYPOINT JOYSTICK KNOBS - ENCLOSED ONLY


AWC2721		3 inch U-Shaped, Joystick Handle, Bodypoint PC101A	79,00
AWC2722		4 inch U-Shaped, Joystick Handle, Bodypoint PC102A	79,00
AWC2723		Domed Rubber, Joystick Handle, Bodypoint PC107A	79,00
AWC2724		Mushroom Grooved, Joystick Handle, Bodypoint PC110A	79,00



2724

SHROUD COLOURS

AWC0202	☐	Blue				○
AWC0228	☐	Black	AWC0220	☐	Champagne	○
AWC0204	☐	Transparent Cherry Red				217,06
AWZ0299	☐	Special Shroud Colour (RAL code required)				RAL : _____ 764,93

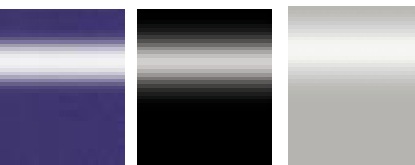

AWC0840	☐	10" Grey Pneumatic		◆
AWC0858	☐	10" Grey Puncture Proof sealed		130,81
AWC0842	☐	10" Grey Puncture Proof (solid inlay)		150,71



REAR WHEELS

AWC0771	☐	14" Grey Pneumatic		◆
AWC0773	☐	14" Grey Puncture Proof (sealed)		130,81
AWC0750	☐	14" Grey Puncture Proof (solid inlay)		238,86

Motors

AWC1277	6 km/h		
---------	--	--	---

AWC1364	Batteries 73,5 Ah		
---------	---	--	---


AWC1313	☐	OptiCharge Charger 10A		◆
AWC1314	☐	Opti Charge Charger 10A (UK Plug)		◆

AWC1203		Heavy duty suspension		
---------	---	-----------------------	--	---

G-TRAC						
AWC1215	☐	G-Trac Module				1 035,07
POSITIONING OPTIONS						
Think of Bodypoint positioning accessories: belts, harnesses, ankle supports.						
OPTIONS						
LIGHT						
AWC1437	☐	LED Light system with indicators				650,24
AWC1254	☐	Without Light system				◆
TRANSPORTATION KIT						
AWC1494	☐	4-Point tie-down (Tested version for using wheelchair as a vehicle seat according to ISO 7176-19) (Adequate headrest is compulsory)				◆
LAP BELT						
AWC1455	☐	Lap Belt extra long with Auto Lock				◆
REARVIEW MIRROR)						
AWC1415	☐	Right	AWC1339	☐	Left	70,14
CANEHOLDER						
AWC1312	☐	Right	AWC1363	☐	Left	68,25
FENDER (Pair)						
AWC1417	☐	Fender for rear Wheels				221,80
TOOLKIT						
AWC1333	☐	Toolkit				29,38
RAMPS						
1440530	☐	Fiberglass Folding Mono Ramp Folded dimensions: 2000 x 230 mm 16.3 kg - maximum capacity: 300 kg				1 787,68
1654128	☐	Basic ramp 2 telescopic parts in aluminum and non-slip coating. Folded dimensions: 1210 x 194 mm. 8.8 kg per pair - maximum capacity: 270 kg				298,58
1654129	☐	Quick2go Compact 3-part aluminum telescopic ramp with non-slip coating Folded dimensions: 870 x 237 mm 13.6 kg per pair - maximum capacity: 260 kg				559,24
1654130	☐	Aluminium folding mono ramp Folded dimensions: 1824 x 714 mm 13.9 kg - maximum capacity: 300 kg				317,54



1437



1455



1417



1440530



1654128




1654129



1654130



1437



1455



1417



1440530



1654128



1654129



1654130